


SUPER MATERIAL LIFT

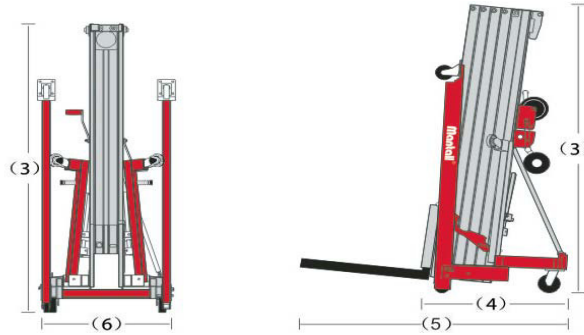

Model	ALP-10		ALP-15		ALP-20		ALP-25	
	Metric system	in	Metric system	in	Metric system	in	Metric system	in
Measurements								
Working height								
standard forks-up	3.48m	11 ft 5 in	5.00m	16 ft 5 in	6.45m	21 ft 2 in	7.95m	26 ft 1 in
standard forks-down	2.96m	9 ft 8 in	4.48m	14 ft 8 in	5.93m	19 ft 6 in	7.43m	24 ft 5 in
Adjustable forks-up	3.48m	11 ft 5 in	5.00m	16 ft 5 in	6.45m	21 ft 2 in	7.95m	26 ft 1 in
Adjustable forks-down	2.96m	9 ft 8 in	4.48m	14 ft 8 in	5.93m	19 ft 6 in	7.43m	24 ft 5 in
Flat forks	2.96m	9 ft 8 in	4.48m	14 ft 8 in	—	—	—	—
Boom***	3.28m	10 ft 10 in	4.76m	15 ft 7 in	6.25m	20 ft 6 in	7.42m	24 ft 2 in
Load platform**-forks up	3.49m	11 ft 5 in	4.98m	16 ft 4 in	6.46m	21 ft 2 in	7.94m	26 ft
Load platform**-forks down	2.97m	9 ft 8 in	4.46m	14 ft 7 in	5.94m	19 ft 6 in	7.42m	24 ft 2 in
Height-stowed	1.98m	6 ft 6 in	1.98m	6 ft 6 in	1.98m	6 ft 6 in	1.98m	6 ft 6 in
Length-stowed	0.75m	2 ft 6 in	0.75m	2 ft 6 in	0.75m	2 ft 6 in	0.83m	2 ft 8 in
Length-operating	2.2m	7 ft 2 in	2.2m	7 ft 2 in	2.2m	7 ft 2 in	2.2m	7 ft 2 in
Width-stowed	0.79m	2 ft 7 in	0.79m	2 ft 7 in	0.79m	2 ft 7 in	0.79m	2 ft 7 in
—stabilizers lowered	1.9m	6 ft 2 in	1.9m	6 ft 2 in	1.9m	6 ft 2 in	1.9m	6 ft 2 in
Width-straddle base*								
Minimum	0.80m	2 ft 7 in	0.80m	2 ft 7 in	—	—	—	—
Maximum	1.47m	4 ft 10 in	1.47m	4 ft 10 in	—	—	—	—
Maximum inside	1.27m	4 ft 2 in	1.27m	4 ft 2 in	—	—	—	—
Ground clearance-center	0.05m	2 in	0.05m	2 in	0.05m	2 in	0.05m	2 in
Load height minimum	0.15m	6 in	0.15m	6 in	0.15m	6 in	0.15m	6 in
Productivity								
Load capacity								
46cm load center	454kg	1000 lbs	363kg	800 lbs	363kg	800 lbs	295kg	650 lbs
61cm load center	454kg	1000 lbs	363kg	800 lbs	272kg	599 lbs	204kg	449 lbs
1.07m load center	181kg	399 lbs	227kg	500 lbs	159kg	350 lbs	113kg	249 lbs
Power								
Power	Single speed w in							
Weight								
Standard	163kg	359 lbs	183kg	403 lbs	203kg	447 lbs	224kg	493 lbs